HeoZ

Model: HZ-VP07FMG

GSM Intercom

Description

- Robust SUS304 housing (SUS316 optional).
- Flush Mounting (Wall mounted optional).

- Waterproof grade is IP55/IP66.
- Power supply is 12V DC.
- Dry relay contact for auxiliary control.
- Crystal tone quality, echo cancellation.
- Lightning protection to ITU-T recommendation K21.
- Ambient Temperature: -40 ~+70 degree celsius.
- Rechargeable battery for optional

Specification

- **Ambient Temperature:** -30 ~ +70 degree celsius
- **Relative Humidity:** 0 ~95%
- **Communication:** Full Duplex. SMS remote alarm.
- **Working Frequency Range:** GSM 850/900/1800/1900MHz
- **Adapter Input:** 7.4-12VDC
- **Power Consumption:** Idle current 75mA, off hook
- current 160mA.
- **Sound Level of Ringing:** >90dB(A). 3w speaker
  MTBF:100,000 hours.
- **MTTR:** 2 hours..

Applications

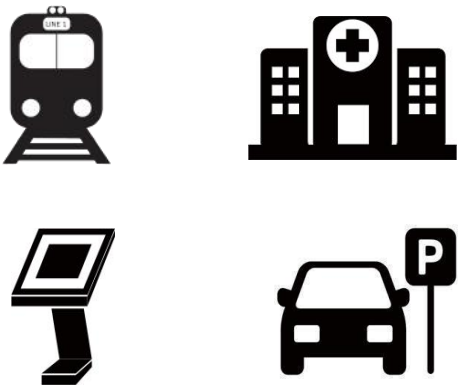

Operation

- Push the button and you will be immediately connected to help center.
- Be prepared to answer questions concerning the nature of your call.

© 2022 HeoZ Technology Co., Ltd

Installation

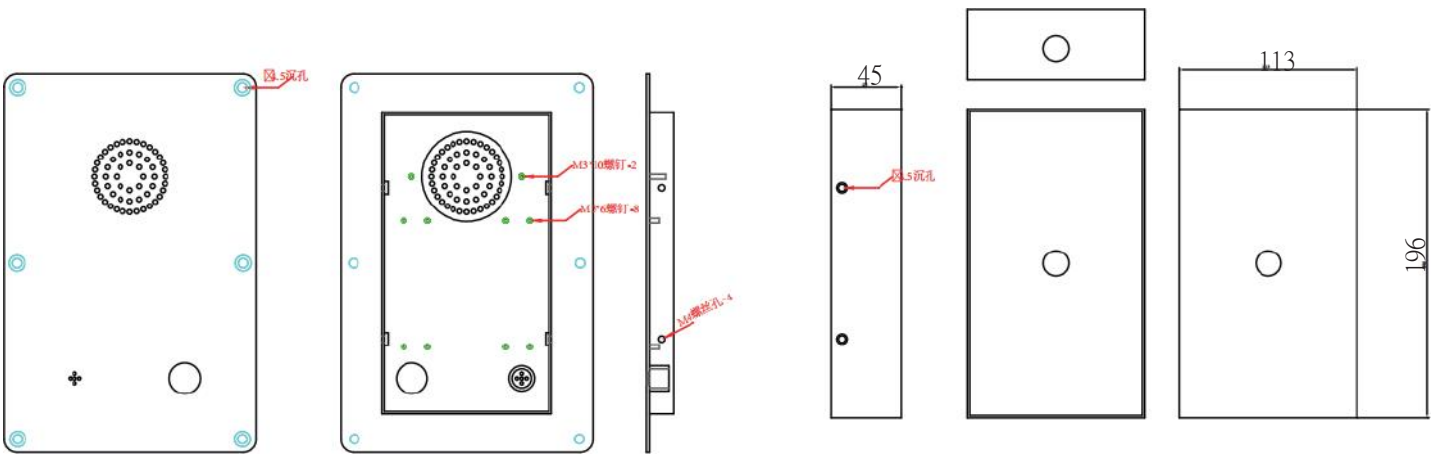

Packing

- **Unit size:** 196x113x45mm
- **Net weight:** 3.0kg
- **Packing size:** 220x140x65mm
- **Gross weight:** 3.2kg
- **Packing box:** Carton box

Order Information

Item Description	Model Number
GSM Telephone	HZ-VP07FMG
OEM or ODM	HZ-VP07FMGX

Warranty

36 months of defect warranty by manufacturer.

Please consult brochure for more information or visit: www.heoztech.com
Email: info@heoztech.com
Tel: +86 0755 2721 2891

Created: 25.03.2015 Updated: 14.01.2023

© 2020 HeoZ Technology Co., Ltd