

VoIP Weatherproof Subway Phone

Description

- SMC die-casting shell with high mechanical strength and impact resistance.
- Heavy duty handset with hearing aid compatible receiver, noise canceling microphone.
- Silicone rubber keypad and magnetic hook switch.
With LCD display
- Weatherproof grade is IP65/IP66.
- Beacon and loudspeaker option.
- Lightening protection to ITU-T recommendation K.21.

- Powder coated in UV stabilized polyester finish.
- The size and style of waterproof telephone can be customized according to customer demand.



Specification

- **Communication:** Full Duplex **SIP Support:** SIP2.0(RFC3261).
- **Speech Coding:** G.711A/ u, G.7321 high/ low, G.729 a/ b, G.722, G.722.1, G726.
- **Echo Cancellation Code:** G.167 /G.168
- **Circumstance noise:** $\leq 60\text{dB(A)}$.
- **Sound Level of Ringing:** $>90\text{dB(A)}$.
- **Auxiliary Contact:** 1Aux output, dry contact.
- **Power Supply:** AC110--240V or PoE .
- **Rated Carry Current:**1A
- **DTMF:** VoIP SIP Info DTMF Relay, RFC2833
- **LAN Protocols:** Power over Ethernet(PoE, 802.3af)
- **WLAN:** IEEE802.3af, **Network Access Control:** IEEE802.1x
- **IP Protocols:** IPV4, UDP, DHCP, SIP.
- **MTBF:**100,000 hours. **MTTR:** 2 hours.

Applications

- The telephone is generally used in different work areas like tunnels, trackside, oil&gas, shipboard, bridge, power plants, poolside, etc.



Operation

- Programming and configuration through web GUI.
- Management and operation: DHCP and static IP, remote automatic software upgrade.

Packing


Unit size: 260x234x120mm

Net weight: 4.2kg

Packing size: 270x245x135mm

Gross weight: 4.5kg

Packing box: Carton box

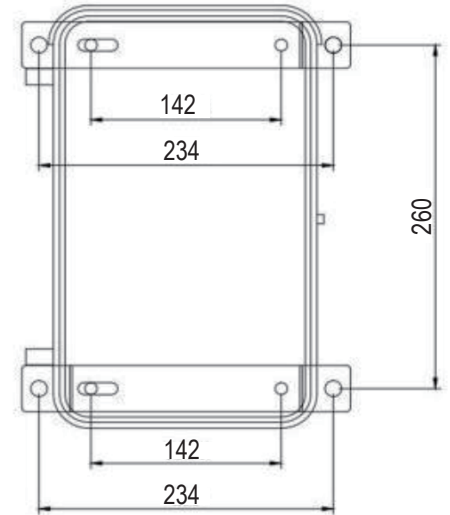

Order Information

Item Description	Model Number
Telephone without broadcasting	HZ-WP06LCDV
Telephone with LED	HZ-WP06LCDLV
Telephone with loudspeaker + beacon	HZ-WP06LCDHBV
OEM or ODM	HZ-WP06LCDXV



Warranty

36 months of defect warranty by manufacturer.

Please consult brochure for more information or visit: www.heoztech.com

Email: info@heoztech.com

Tel: +86 0755 2721 2891